

Roverpet Dog Gate Assembly Instructions

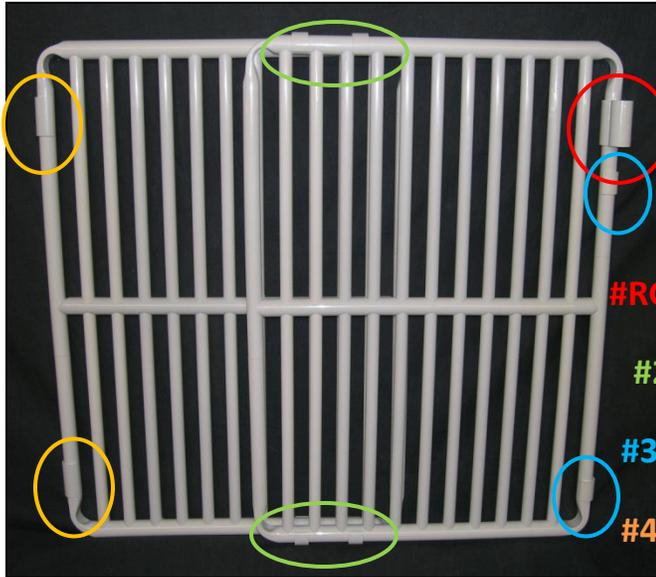


Figure 1

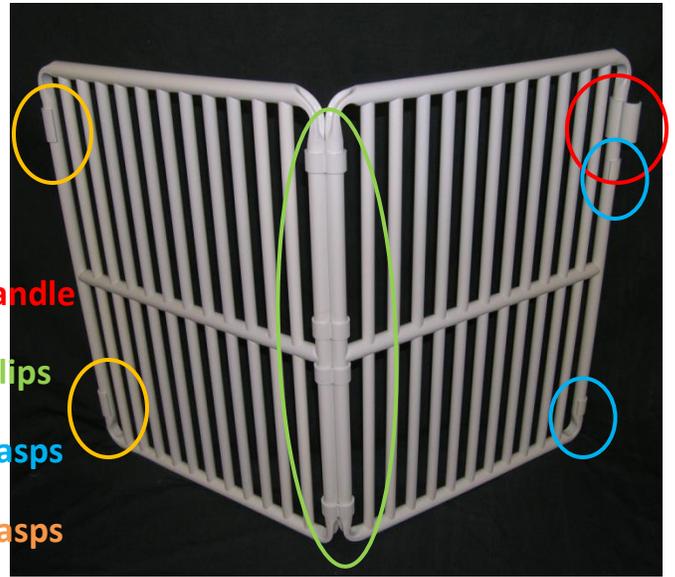


Figure 2

Inventory List: Roverpet #36RP & 48RP Pet Gate

The inventory for Roverpet Dog Gate includes;

- (2) Roverpet PVC Panels
- (1) #RGC Clasp Set & mounting hardware
- (1) #RGH Gate Handle
- (6) #250 Clips

Assembly Procedure


- 1.) Unpack contents of shipping carton and compare to inventory list above.
- 2.) Decide which mounting option will best fit your needs. See bullets below for mounting options.
 - Face mounted gates require the **hinging and latching sides** of the gate to be mounted to the trim-side of a doorway/hallway, and **less than 42" wide**.
Example: mounted at the end of a hallway where the ends of the walls are accessible.
 - 'V' Shape mounted gates require the **hinging and latching sides** to be opposing to one another, and **less than 42" wide**. Most mounting positions can accommodate 'V' Shaped mounting.
Example: mounted in the middle of a hallway with no doorways on either side.
 - If you are mounting the gate with additional **Stacking Panels** in a face mounted configuration, the overlapping upright bars need to be in-line with one another for proper setup. (See Figure 1) Read both sets of instructions completely before beginning the installation.
 - If your mounting location requires you to have a gate width **wider than 42"**, an extension panel will need to be purchased from www.roverpet.com.

For maximum strength capabilities, mount the Roverpet Dog Gate on the same side of doorway/hallway that your pet will be contained. Allow a 'V' Shaped arrangement to extend into the area that your pet will be contained.

Continue assembly instructions on next pages for the mounting configuration desired

Assembly for Doorway/Hallway Face Mounting

(See Figure 1)

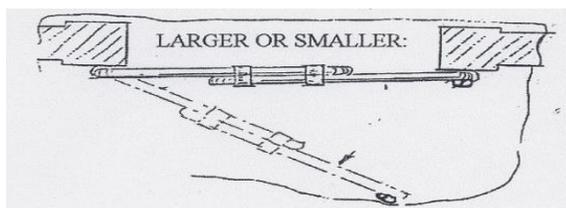

- 3.) If your needs require the gate to be left-hand opening, un-snap the #RGH Handle from the Roverpet PVC Panel, and install it on the opposite side of the Panel. Note that for left-hand opening gates, the assembly procedure will be reversed for the #RGC Clasp set installation that follows. (See diagram on next page)
- 4.) The #450 Wall Clasps (2-1/4" length) need to be secured to the wall on the **HINGED SIDE** of the gate. They need to be aligned vertically along the doorway/hallway opening. The #450 Clasps should be mounted 6" above the bottom of the gate, and 6" below the top of the gate. Use the supplied hardware to mount the clasps to the wall using a #2 Phillips screwdriver. Use a 1/8" drill bit if pilot holes are needed..


Please Don't Over Tighten Supplies Screws

- If your Roverpet Dog Gate was supplied with more than (2) #450 Clasps, the remaining #450 Clasps need to be mounted between the top and bottom #450 Clasps that were just installed on the wall, verify the locations will not interfere with the center bar of the Roverpet PVC Panel.
- 5.) Mount the #350 Wall Clasps (1-1/8" length) in the same manner as in Step 4. Mount them on the opposite wall from the installed #450 Clasps. The #350 Clasps are used on the **LATCH SIDE** only with the #RGH Handle.
- 6.) Remove the installed #250 Clips from the Rover Panels. Expand the panels to stretch between the mounted #450 and #350 Clasps. Reinstall the #250 Clips to the top and bottom of the Roverpet PVC Panels. Snap the Roverpet Pet Gate into the Wall Clasps. Make certain the **HINGED SIDE** of your gate is secured in the #450 Clasps.

Congratulations, you are now ready to use your Roverpet Dog Gate!

Note: *With a new Roverpet Dog Gate installed, the Wall Clasps can seem excessively tight or noisy.*

A thin coat of Vaseline on the inside of the Wall Clasps can greatly assist with these issues.

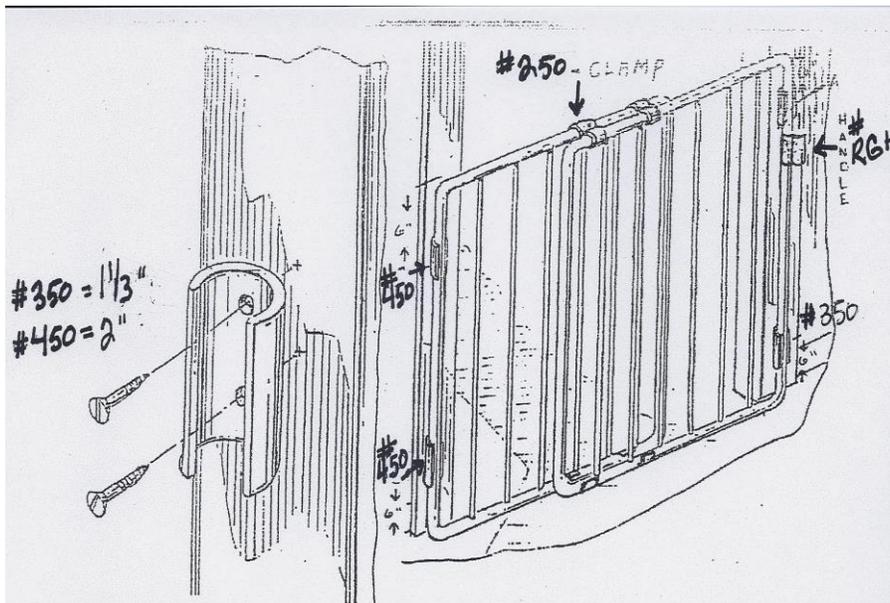

Assembly for 'V' Shape Mounting

(See Figure 2)


- 3.) If your needs require the gate to be left-hand opening, un-snap the #RGH Handle from the Roverpet PVC Panel, and install it on the opposite side of the Panel. Note that for left-hand opening gates, the assembly procedure will be reversed for the #RGC Clasp set installation that follows. (See diagram below)
- 4.) The #450 Wall Clasps (2-1/4" length) need to be secured to the wall on the **HINGED SIDE** of the gate. They need to be aligned vertically along the doorway/hallway opening. The #450 Clasps should be mounted 6" above the bottom of the gate, and 6" below the top of the gate.

Roverpet 20 Kiji Dava Circle Prescott, Arizona 86301 (800) 658-5925 rover@roverpet.com

- If your Roverpet Dog Gate was supplied with more than (2) #450 Clasps, the remaining #450 Clasps need to be mounted between the top and bottom #450 Clasps that were just installed on the wall, verify the locations will not interfere with the center bar of the Roverpet PVC Panel.
- 5.) Mount the #350 Wall Clasps (1-1/8" length) in the same manner as in Step 4. Mount them on the opposite wall from the installed #450 Clasps. The #350 Clasps are used on the **LATCH SIDE** only with the #RGH Handle.
 - 6.) Remove the installed #250 Clips from the Roverpet PVC Panels. Snap one side of a Roverpet PVC Panel into the #450 hinge clasps. Make certain the **HINGED SIDE** of your gate is secured in the #450 Clasps. Snap the side of the second Roverpet PVC Panel with the #RGH Handle into the #350 latch clasps. Install the #250 Clips to connect the Roverpet PVC Panels together where they meet in the 'V' Shape.

Congratulations, you are now ready to use your Roverpet Dog Gate!

Note: With a new Roverpet Dog Gate installed, the Wall Clasps can seem excessively tight or noisy. A thin coat of *Vaseline* on the inside of the Wall Clasps can greatly assist with these issues.

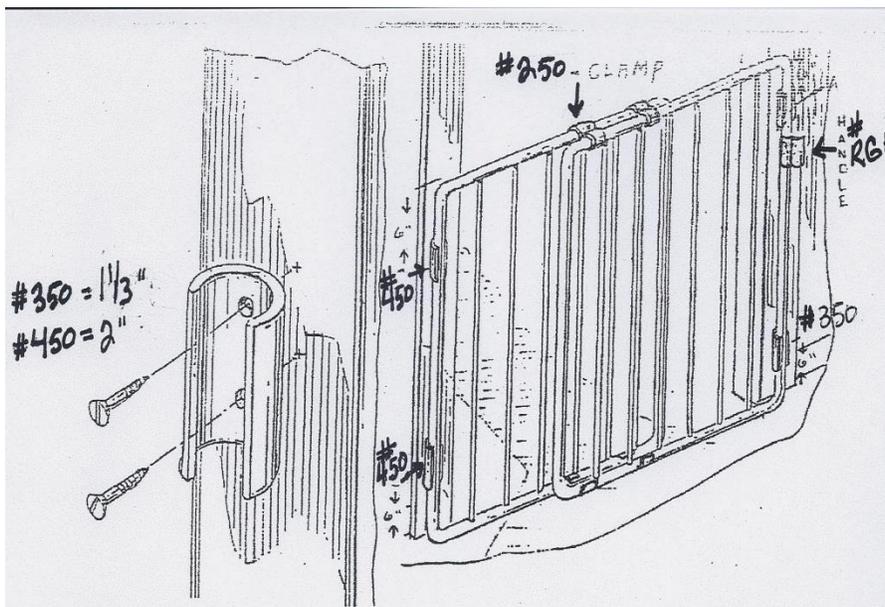

www.roverpet.com

Property of Roverpet



Quality your pet deserves

